# THE MOSAIC FACTORY

### Certificate of Conformity

Product: Country of Origin: Type designation:	Glazed mosaic TMF® Sevilla collection, Kitkat mini's CN ( 69073000 ) SEF12078, SEF12100, SEF12140, SEF325, SEF12525, SEF12625, SEF12915, SEF12925

**Technical Data:**Dry-pressed ceramic tiles for floorings and wall finishes, interior and exterior, with<br/>water absorption Eb < 0.5%, Group B I a, flat, glazed 92mm x 12mm

Name of product	Glazed Mosaic	Nominal size (N)	92x12mm
Nature of the surface	Glazed (GL)	Work size	92mm x 12mm x 8mm
Group	Bla	Intended use	Floorings and wall finishes
			Interior and exterior

Image:



#### The above product has been tested for CE marking according to:

**EN 14411:2016** Ceramic tiles – Definition, classification, characteristics, assessment and verification of constancy of performance and marking

Clause	Properties	Test Method	Requirements	Results	Verdicts		
	Dimensions and surface quality						
Α	Length	EN ISO 10545-2:2018	±0,9mm	0mm + 0,1mm	Pass		
	Width	EN ISO 10545-2:2018	±0,5mm	-0,1mm - 0,3mm	Pass		
	Thickness	EN ISO 10545-2:2018	±0,5mm	0 - 0,1mm	Pass		
	Physical properties						
В	Water absorption	EN ISO 10545-3:2018	<0,5%	0,22%	Pass		
	Breaking strength in N	EN ISO 10545-4:2019	>1300	1985	Pass		
	Modulus of rupture, in Mpa	EN ISO 10545-4:2019	Minimum 35	49	Pass		
	Thermal shock resistance	EN ISO 10545-9:2013	Pass	Fully resistance	Pass		
	Crazing resistance Glazed tiles	EN ISO 10545-11:1996	Pass	Fully resistance	Pass		
	Frost resistance	EN ISO 10545-12:1997	Pass	Fully resistance	Pass		
		DIN 51130:2014	Declared value	<5,0°			
		DIN 51097					
			PTV Slider 96 dry	~57			
	Slipperiness	BS 7976	PTV Slider 96 wet	~7			
		001010	PTV Slider 55 dry				
			PTV Slider 55 wet				
	Reaction to fire	CWT	Class A1 or A1FL	Wall Class A1	Pass		
				Floor A1FL	Pass		
С	Chemical properties						
	Resistance to staining	EN ISO 10545-14:2015	Minimum Class 3	Class 5	Pass		
	Resistance to chemicals	EN ISO 10545-13:2016	Minimum Class B	Class A	Pass		

## ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14001:2015 and EN14411:2016

Porcelain Mosaic Tiles Manufactured for: UCI - The Mosaic Factory Country of Origin: China

Issue date: 15/11/2023



#### 1. General information

#### 1.1 The organization

The manufacturer is a leading manufacturer for porcelain mosaic tiles in China and produces for The Mosaic Factory in The Netherlands. The company was founded in 1998.

#### 1.2 Scope of the declaration

This document refers to the porcelain mosaic tiles manufactured for The Mosaic Factory.

#### **1.3 Declared product / Declared unit**

1 m<sup>2</sup> porcelain mosaic tiles (average)

#### 2. Product

#### 2.1 Identification of the product

This EPD document covers the glazed and unglazed porcelain mosaic tiles pertaining the water absorption group Bla, classification based on EN14411:2016. This is their water absorption is less than 0.5%. The porcelain mosaic tiles included in the study cover different models and different formats. The chip sizes in the scope of this EPD are from Dia 19mm to 28mm, square 23x23mm to 95x95mm, rectangle 10.5x48mm to 72x293mm, hexagon 23x26mm to 95x110mm, and other shapes such as lantern, fanshape, quadrangle. The thickness formats are from 5mm to 10mm, with an average weight of

12.5kg/m².

#### 2.2 Intended use of the product


The function of the product is to cover surfaces. In this study the environmental behavior of the porcelain mosaic tiles as indoor house surface covering has been assessed, however, the versatility of these pieces allows them to be installed in other places, such as offices, stores, hospitals, etc, in indoor and outdoor environments, as well as covering walls and other surfaces. The product features are included in the technical datasheets which can be requested from the manufacturer, being them, the ones required by the EN 14411:2016 standard.

#### 2.3 Reference service life

The Service Life of the product is the same as that of the building where it is installed if it is installed correctly, as it is a durable product which does not require substitution. A Reference Service Life of 50 years has been considered.

#### 2.4 Product production process

- A1. Raw material selection and supply
- A2. Transport to the manufacturer
- A3. Manufacturing

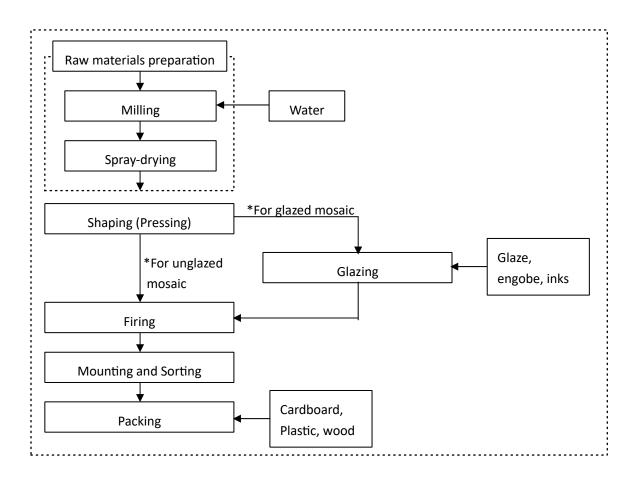

The above production processes adhere to the highest environmental standards. From raw material sourcing to the final stages of manufacturing, we prioritize eco-friendly practices that not only ensure the quality of our products but also reduce energy consumption and waste generation.

#### 3. Key Environmental Initiatives

#### 3.1 Resource Efficiency

- We optimize resource usage to minimize waste and maximize efficiency in the production process.
- Recycling and reusing materials wherever possible to reduce our reliance on virgin resources.

#### 3.2 Energy Conservation

- Our facilities are equipped with energy-efficient technologies, such as LED lighting and energy-saving machinery.
- We continually explore renewable energy sources to power our operations, reducing our carbon footprint.

#### 3.3 Emission Reduction

- We invest in advanced emission control systems to minimize air and water pollution.

- Regular audits ensure compliance with stringent emission standards, contributing to a cleaner environment.

#### 3.4 Water Management

- Implementing water recycling systems to minimize water consumption during production.
- Monitoring and controlling wastewater to ensure it meets or exceeds regulatory standards.

#### 4. Declaration of the environmental parameters

1 m² of porcelain mosaic tiles (group Bla)	Minimum content	
Total water content (kg)	28.6	
Fresh water content (kg)	3.63	
Pre-consumer recycled water content (kg)	24.97	
Total solids content (kg)	18.56	
Virgin solids content (kg)	16.6	
Pre-consumer recycled solids content (kg)	1.96	
Total energy save for mounting process (KW) Note: The waste heat of the kiln 100% use for mounting line.	0.43	

#### 5. Declaration

This Environmental Product Declaration is issued by the manufacturer for The Mosaic Factory. It is a self-declaration based on the production operating data.